

Rackmount

Product #OSS-PCI-4U-ENCL-2012-700



Description

4U high passive backplane-based enclosure with dual 350 watt power supplies, and your choice of passive backplane.

Features

- Dual redundant 350 watt power supplies
- Up to four 5 1/4 inch drive bays and up to six 3 1/2 inch drive bays
- Superior cooling with five fans and removeable air filters
- Supports up to 19-slot PICMG-compatible passive backplanes
- 2012- in part number indicates backplane selected


Specifications

Chassis Specifications	
Mounting	19in (482.6mm)
Dimensions (W x H x D)	• 17in x 7in x 25.25in (432mm x 178mm x 642mm)
Front Panel Indicators	Power on LED (Green)
Front Panel Controls/ Connections	• Power on/off switch • System reset switch
Drive Capacity	Four 3.5-inch Hot Swappable
Cooling Fans	Five 50.6CFM fans
Air Filter	• One 30 ppi (pores per inch) air filter, open cell, polyfoam, UL 900 rating
Construction	Clear film Aluminum
Paint	Black front, medium texture paint or to customer's specification
Weight	65pounds (16.7kg)
Power Supply Specifications	• Dual 350 watt output • 100/240 VAC 50/60HZ • Auto sensing • UL, CSA and TUV approved • Outputs per supply: 5V @ 32A, 3.3V @ 20A, +12V @ 11A, -12V @ 1A, -5V @ 1A • Total Max 5V & 3.3V: 160W



www.onestopsystems.com

Phone 877-438-2724 • Fax 760-466-1678 • salas@onestopsystems.com

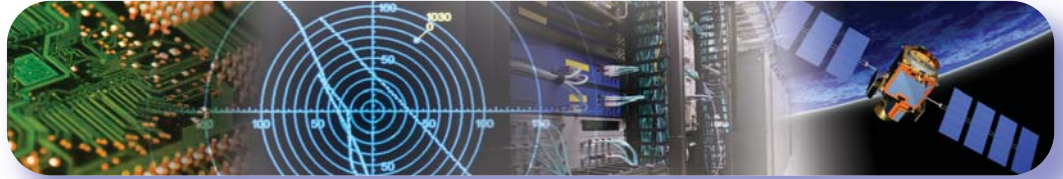

Rackmount

Product #OSS-PCI-4U-ENCL-2012-700

Specifications - continued

Operating Environment	
Temperature Range	0 ° to 50 °C (32 ° to 122 °F)
Relative Humidity	10 to 90% non-condensing
Shock	30g acceleration peak (11ms pulse)
Vibration	5-17 Hz 0.5" double amplitude displacement; 7-2000Hz, 1.5g acceleration

Rear View

