


ONE STOP
SYSTEMS

PCIe x4 Host Cable Adapter

PCIe x4 host cable adapter can be inserted into a x4, x8 or x16 slot of a host enclosure to extend the host bus to an expansion system or PCIe device. OSS-PCIe-HIB2-x4-H

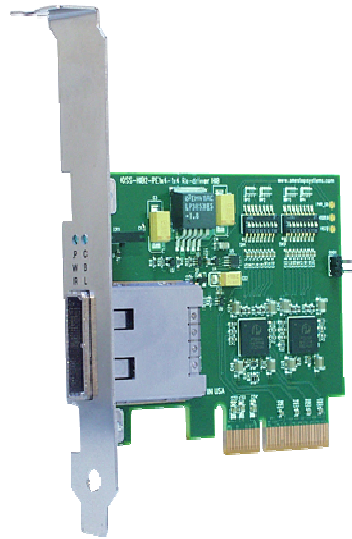

- PCI Express x4 cable connector on slot cover
- Power on / cable present LEDs
- No software drivers required
- Redriver-based technology
- 10 Gbps cable bandwidth

TECHNICAL SPECIFICATIONS

PCIe x4 Host Cable Adapter

Form Factor	x4 PCIe add-in card
Dimensions (H x L)	2.713 x 3.354" (68 x 86mm)
Front Panel Connectors	One PCIe x4 cable connector
Front Panel Indicators	Power On / Cable Present LEDs
Redriver	Pericom PI2EQX4402
Temperature Range	0° to 50°C (32° to 122°F)
Relative Humidity	10 to 90% non-condensing
Shock	30g acceleration peak (11ms pulse)
Vibration	5-17 Hz 0.5" double amplitude displacement; 7-2000Hz, 1.5g acceleration
Power Consumption	3.75W typical, 3.3@1.3A
Agency Compliance	FCC Class B CE RoHS



www.onestopsystems.com