


ONE STOP
SYSTEMS

PCIe Downstream Cable Adapter

PCIe x4 switch-based cable adapter with one switch as non-transparent, installs in the PCIe slot of two or more PC's, along with ExpressNet installed on each PC allows PC-to-PC communication. OSS-PCIe-HIB4-x4

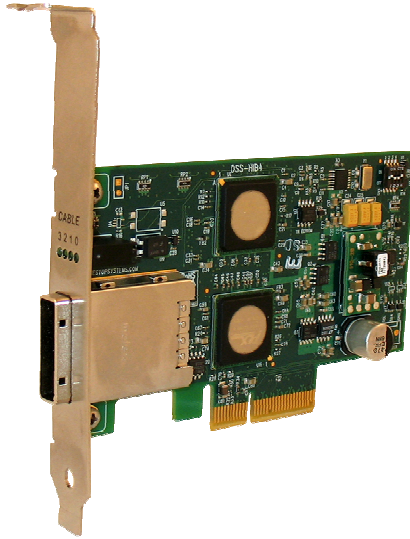

The low profile PCIe card connects to a host interface board, or PCIe switch through a PCIe x4 cable.

PCIe cables available in 1m, 2m, 3m, 5m and 7m lengths

TECHNICAL SPECIFICATIONS

PCIe x4 Host Cable Adapter	
Form Factor	PCIe x4 add-in card
Dimensions (H x L)	2.713" x 4.395" (68.9mm x 111.6mm)
Front Panel Connectors	One PCIe x4 cable connector
Front Panel Indicators	Status LEDs
External Interface	One x4 PCI Express cable connected as x4
Temperature Range:	0° to 55°C (32° to 131°F)
Relative Humidity:	10 to 90% non-condensing
Shock:	30g acceleration peak (11ms pulse)
Vibration:	5-17 Hz 0.5" double amplitude displacement; 7-2000Hz, 1.5g acceleration
Power Consumption	6.5W maximum, 12V@ .4A and 3.3V@ .45A
Agency Compliance	FCC Class B CE RoHS



www.onestopsystems.com