




PCIe Riser

Single-width, PCIe x8 passive riser/slot saver installs in a standard PCIe slot and supports a single x1, x4, or x8 add-in card.

PN: OSS-PCIe-RISER-x8

Features

- PCIe x8 card edge/PCIe slot
- Passive
- On board voltage monitoring
- Voltage margining +/- 18%
- Manual or software controlled power on/off switch

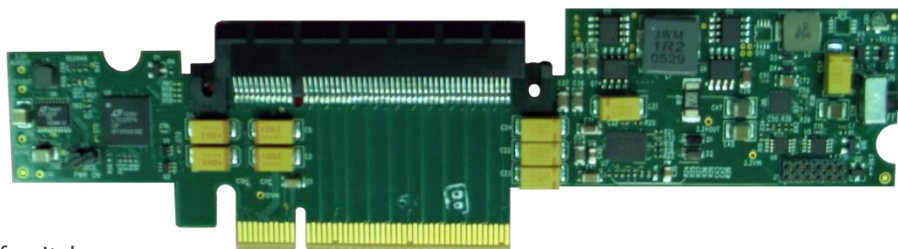

Specifications

Form factor	Half length
Dimensions:	6.50" L x 1.75" H
Connectors	PCIe x8 edge connector PCIe x8 slot
Operating Temperature	0°C to +50°C
Storage temperature	-40°C to +85°C
Operating Humidity	10% to 90% relative humidity non-condensing
Storage Humidity	5% to 95% relative humidity non-condensing
PCB	PCIe add-in card standard Thickness .063 +/- .0008"
Bracket	Standard full height
LED's	Activity indicator Power on Manual power on/off button
Agency Compliance	Designed to meet: FCC Class A CE ROHS

Block Diagram

