




PCIe x4 Gen 2 Host/Target Cable Adapter

PN: OSS-PCIe-HIB25-x4-H/T

Features

- PCIe x4 Gen 2 HOST cable adapter installs in a x4, x8, or x16 expansion slot of a host system. The TARGET adapter operates ONLY in the OSS 2-slot backplane to extend the PCIe bus to one additional PCIe slot.
- The HIB25-x4-H/T adapter requires no additional software or drivers.

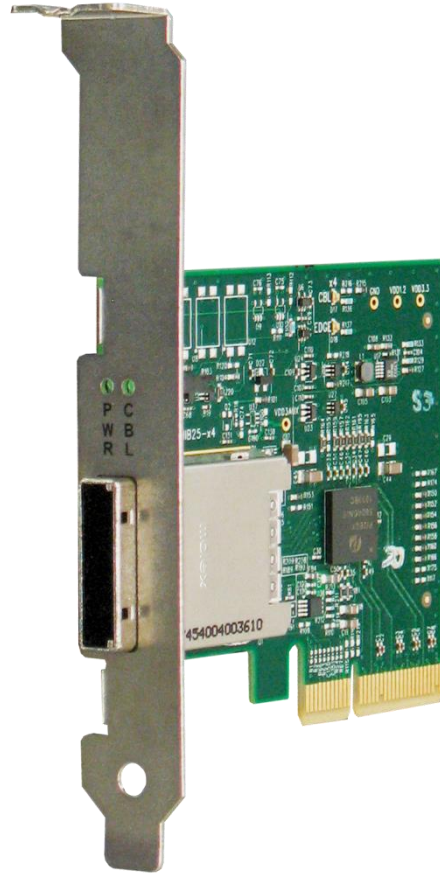

Specifications

| PCIe x4 Host Cable Adapter | |
|-----------------------------------|---|
| Dimensions (H x L): | 2.7 x 3.1 " (68 x 78mm) |
| Front Panel Connectors: | One PCIe x4 cable connector |
| Front Panel Indicators: | Power On / Cable Present LEDs |
| Re-drivers: | Pericom PI2EQX5804 |
| Tempertaure Range: | 0° to 50°C (32° to 122°F) |
| Relative Humidity: | 10 to 90% non-condensing |
| Shock: | 30g acceleration peak (11ms pulse) |
| Vibration: | 5-17 Hz 0.5" double amplitude displacement; 7-2000Hz, 1.5g acceleration |
| Power Consumption: | 3.75W typical, 3.3@1.3A |
| Agency Compliance: | FCC Class B, CE, RoHS |